



## ROLLS AND CUT PADS


LUFIL PS4514

Width A (mm)  
 Length B (m)  
 Thickness C (mm)  
 Media area (m<sup>2</sup>)  
 Flow rate (m<sup>3</sup>/h) /  
 Delta P (Pa)

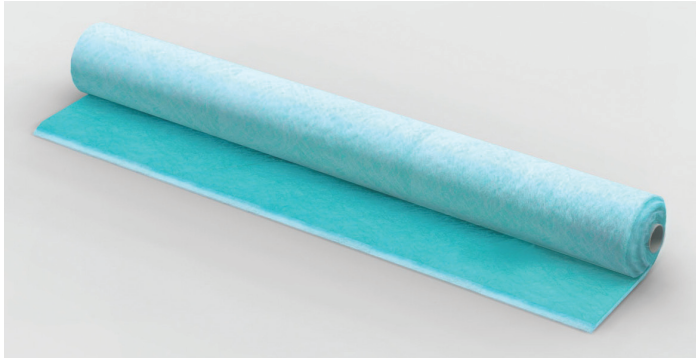

G3 - ISO COARSE 50% ISO 16890					
LUFIL PS4514	2000	20	100	40	6300 / 40



**Tip**  Check the elasticity of the media by dropping, from 1 meter high, a coin. If it correctly bounces, the elasticity is good.

A reinforced layer on clean air side prevents any paint particle to be released.

### DGPS

#### APPLICATIONS

- Paint mist separator in spray booth and coating extract systems
- Primary filtration on gas turbines

#### ADVANTAGES

- Cutting service
- Progressive density
- High retention power
- Airflow direction set by a double green / white color

#### GENERAL FEATURES

- Media: Fiberglass
- Recommended final pressure drop: 200 Pa
- Maximum T° in continuous service: 120°C
- Humidity: 100% RH