

APPLICATIONS



- Primary filtration for air treatment in ventilation and air conditioning

ADVANTAGES

- Low pressure drop
- Mechanical resistance
- Progressive density
- High retention power

GENERAL FEATURES

- Efficiency EN779: G2-G4
- Media: Synthetic
- Final pressure drop: 250 Pa
- Maximum T° in continuous service: 110°C
- Humidity: 100% RH

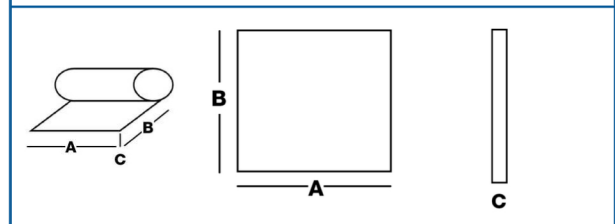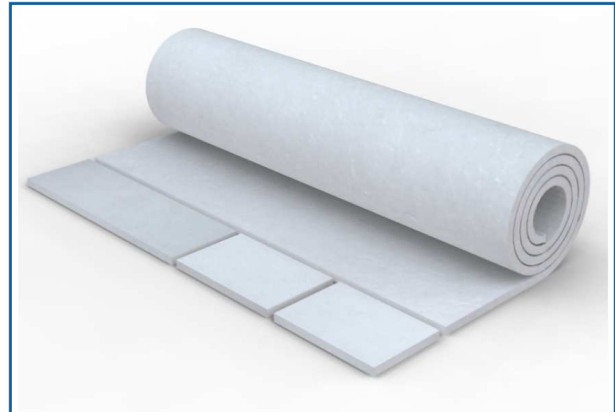

TIP :

The organic media structure allows a more important dust retention capacity.



Description	Efficiency EN779	Width (mm) A	Lenght (m) B	Thickness (mm) C	Media area (m ²)	Flow rate (m ³ /h)	Delta P (Pa)
LUFIL100	G2	2000	40	6	80	5400	20
LUFIL200	G3	2000	20	20	40	5400	27